

ET DOUBLE GLASS PV MODULE

ET-M672370GL 370W

ET-M672365GL 365W

ET-M672360GL 360W

ET-M672355GL 355W

ET-M672350GL 350W



1500V system voltages, save BoS cost



More reliable & durable with frameless design




Higher fire rating enhances safety



Anti-PID technology



Available for residential, commercial & utility sites

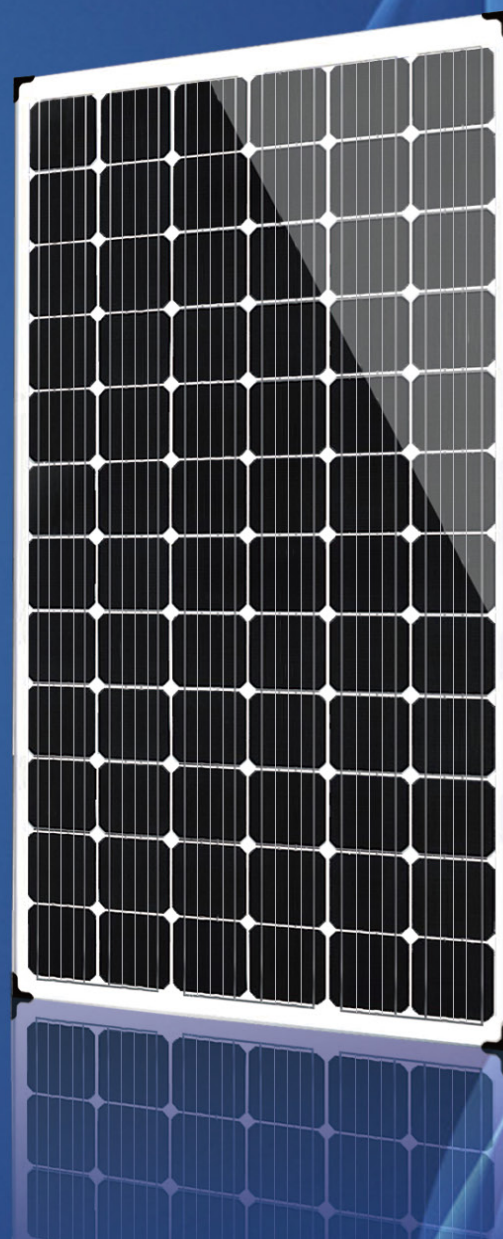

IEC 61215 Ed.2
IEC 61730



ET SOLAR

Tel: +86 25 86898096 Fax: +86 25 86898097



M/ET-PD-EN-EU2019V1

ELECTRICAL SPECIFICATIONS

Model Type	ET-M672370GL	ET-M672365GL	ET-M672360GL	ET-M672355GL	ET-M672350GL
Peak Power (Pmax)	370W	365W	360W	355W	350W
Module Efficiency	18.72%	18.47%	18.22%	17.97%	17.71%
Maximum Power Voltage (Vmp)	39.70V	39.38V	39.05V	38.93V	38.51V
Maximum Power Current (Imp)	9.32A	9.27A	9.22A	9.12A	9.09A
Open Circuit Voltage (Voc)	48.45V	48.22V	47.96V	47.74V	47.64V
Short Circuit Current (Isc)	9.88A	9.77A	9.69A	9.65A	9.59A
Power Tolerance	0 to +5W				
Operating Temperature	- 40 ~ + 85°C				
Maximum System Voltage	DC 1500V				
Nominal Operating Cell Temperature	45±2°C				
Maximum Series Fuse Rating	20A				

MECHANICAL SPECIFICATIONS

Cell Type	156.75mm×156.75mm
Number of Cells	72 cells in series
Weight	28.1 kg (61.95 lbs)
Dimension	1982×997×6 mm (78.03×39.25×0.24 inch)
Junction Box	IP67 rated
Connector	MC4 Compatible
Output cable	4mm ² , 250mm

TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.05% /°C
Temp. Coeff. of Voc (TK Voc)	-0.30% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.42% /°C

PACKING MANNER

Container	40' HQ
Pieces per Pallet	30
Pieces per Container	660


PHYSICAL CHARACTERISTICS

Unit:mm (inch)

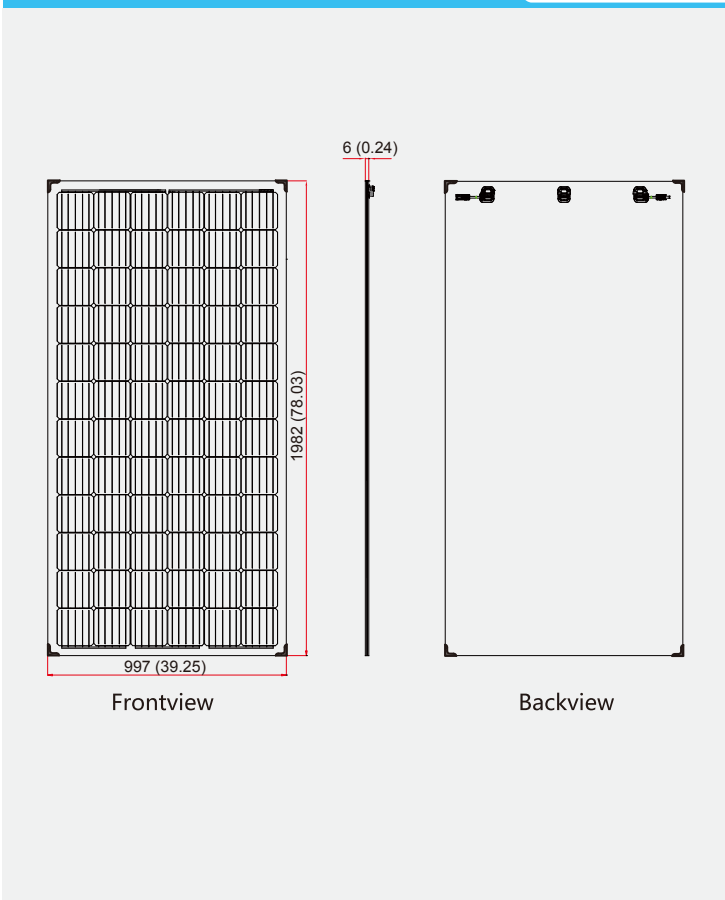


ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (Cell Temperature:25°C)

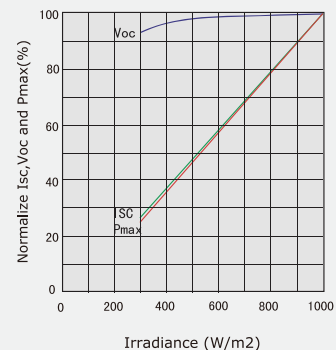

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact support@etsolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.